

Declaration of performance: No. CPR-NO1/0048


1. Unique identification code of the product-type: **MAPECEM PRONTO**
2. Type, batch or serial number or any other element allowing identification of the construction product as required under Article 11(4) of the CPR:
CEMENTITIOUS SCREED MATERIAL (CT-C60-F10)
3. Intended use or uses of the construction product, in accordance with the applicable harmonised technical specification, as foreseen by the manufacturer:
Cementitious screed material for internal use in floor construction
4. Name, registered trade name or registered trade mark and contact address of the manufacturer as required under Article 11(5): **MAPEI AS – Vallsetvegen, 6 – 2120 Sagstua (Norway) www.mapei.no**
5. Where applicable, name and contact address of the authorised representative whose mandate covers the tasks specified in Article 12(2): **Not applicable**
6. System or systems of assessment and verification of constancy of performance of the construction product as set out in Annex V: **System 4**
7. In case of the declaration of performance concerning a construction product covered by a harmonised standard:
No tasks for the notified body.
8. In the case the declaration of performance concerning a construction product for which a European Technical assessment has been issued: **Not applicable**
9. Declared performance:

Essential characteristics	Performance	Harmonised technical specification
Reaction to fire Release of corrosive substances Water permeability Water vapour permeability Compressive strength Flexural strength Wear resistance Sound insulation Sound absorption Thermal resistance Chemical resistance	Class A1_{fi} CT NPD NPD C60 F10 NPD NPD NPD NPD NPD	EN 13813:2002

10. The performance of the product identified in points 1 and 2 is in conformity with the declared performance in point 9.

This declaration of performance is issued under the sole responsibility of the manufacturer identified in point 4.

Signed for and on behalf of the manufacturer by: **Trond Hagerud – Managing Director**
(name and function)

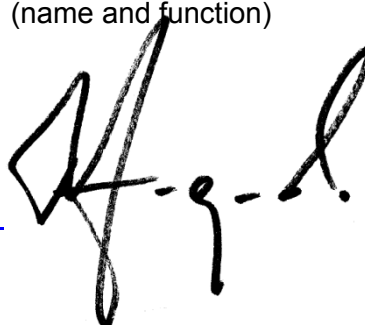

Sagstua, 01/07/2013
(place and date of issue)

.....
(signature)

CE MARKING according to CPR 305/2011 and EN 13813:2002

	 Vallsetvegen 6, 2120 Sagstua (Norway) www.mapei.no																						
13 CPR-NO1/0048 EN 13813:2002 CT-C60-F10 MAPECEM PRONTO <i>Cementitious screed material for internal use in floor construction</i> <table><tr><td>Reaction to fire:</td><td>Class A1_{fl}</td></tr><tr><td>Release of corrosive substances:</td><td>CT</td></tr><tr><td>Water permeability:</td><td>NPD</td></tr><tr><td>Water vapour permeability:</td><td>NPD</td></tr><tr><td>Compressive strength:</td><td>C60</td></tr><tr><td>Flexural strength:</td><td>F10</td></tr><tr><td>Wear resistance:</td><td>NPD</td></tr><tr><td>Sound insulation:</td><td>NPD</td></tr><tr><td>Sound absorption:</td><td>NPD</td></tr><tr><td>Thermal resistance:</td><td>NPD</td></tr><tr><td>Chemical resistance:</td><td>NPD</td></tr></table>		Reaction to fire:	Class A1 _{fl}	Release of corrosive substances:	CT	Water permeability:	NPD	Water vapour permeability:	NPD	Compressive strength:	C60	Flexural strength:	F10	Wear resistance:	NPD	Sound insulation:	NPD	Sound absorption:	NPD	Thermal resistance:	NPD	Chemical resistance:	NPD
Reaction to fire:	Class A1 _{fl}																						
Release of corrosive substances:	CT																						
Water permeability:	NPD																						
Water vapour permeability:	NPD																						
Compressive strength:	C60																						
Flexural strength:	F10																						
Wear resistance:	NPD																						
Sound insulation:	NPD																						
Sound absorption:	NPD																						
Thermal resistance:	NPD																						
Chemical resistance:	NPD																						